




SPECIFICATIONS: SHIMANO CB4 REALTREE XTRA® AND AP SNOW

Front and Rear Shifters	Shimano Deore 2 x 10 Speed
Front Derailleur	Shimano Deore 2 x 10 Speed
Rear Derailleur	Shimano Deore Shadow Plus 10 Speed
Crankset and Bottom Bracket	SRAM X5 GXP100, 175mm crank with sealed bearings, 22/36t gearing
Chain	KMC 10-speed
Derailleur Cable and Housing	Jagwire stainless shift cables and full length housing
Cassette	Shimano Deore – 10-speed, 11/36t gearing
Wheels	Formula sealed-bearing hubs front and rear, Surly 82mm-wide Rolling Darryl rims, DT Swiss stainless steel spokes, Built and finished by hand in the USA
Tires and Tubes	Surly Nate 26x3.8" tires, Surly Light Fat inner tubes
Front and Rear Brakeset	Avid BB7 cable actuated disc brakes, 160mm stainless rotors, Avid FR5 levers
Brake Cable and Housing	Jagwire stainless brake cables and full length compressionless housing
Handlebar	750mm width, 20mm rise, 11° sweepback
Grips	Knurled rubber, Black
Stem	Kalloy. +7° x 90 mm length, Bead-blasted finish, Black
Saddle	Velo, Foam padded with vinyl cover, Black
Seatpost	Kalloy, 31.6 diameter, 400mm length, Bead-blasted finish, Black
Seatclamp	Kalloy, 34.9mm I.D., Bead-blasted finish
Pedals	Wellgo platform type, Black

**Specification subject to change without notice*

GEOMETRY

	SMALL	LARGE
Recommended Rider Height	5'4" - 5'9"	5'10" - 6'4"
A. Top Tube Effective	23.2	24.4
B. Seat Tube Length	16.0	19.0
C. Head Tube Angle	69.5°	69.5°
D. Seat Tube Angle	73°	73°

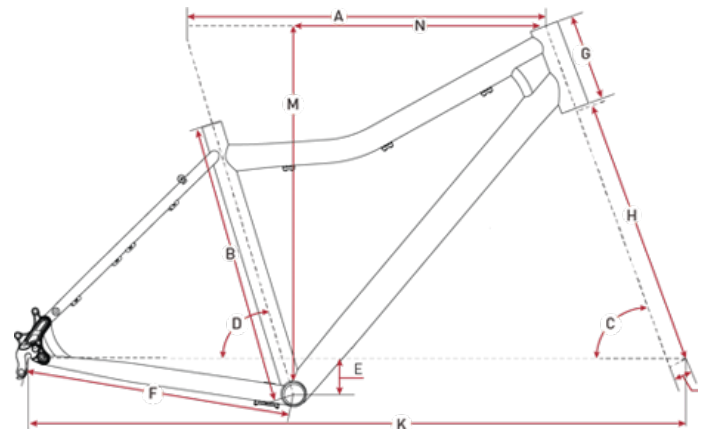

E. BB Drop	2.6	2.6
F. Chainstay Length	18.1	18.1
G. Head Tube Length	5.1	5.9
H. Fork Length	18.4	18.4
I. Fork Offset	1.8	1.8
J. Wheel Base	43.9	45.2
Standover	26.696	29.158